

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
1 April 2004 (01.04.2004)


PCT

(10) International Publication Number  
**WO 2004/026463 A1**

- (51) International Patent Classification<sup>7</sup>: B01J 19/18, 19/24, C08F 10/00, 2/14
- (21) International Application Number: PCT/EP2003/010704
- (22) International Filing Date: 23 September 2003 (23.09.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
02078971.5 23 September 2002 (23.09.2002) EP  
02079384.0 17 October 2002 (17.10.2002) EP
- (71) Applicant (for all designated States except US): ATOFINA RESEARCH [BE/BE]; Société Anonyme, Zone Industrielle C, B-7181 Seneffe (Feluy) (BE).
- (72) Inventors; and  
(75) Inventors/Applicants (for US only): FOUARGE, Louis [BE/BE]; Sleutelpasstraat 4, B-1700 Dilbeek (BE). LEWALLE, André [BE/BE]; 19, avenue Jeanne, Bte 17, B-1050 Bruxelles (BE).
- (74) Common Representative: ATOFINA RESEARCH, S.A.; Patent Department, Zone Industrielle C, B-7181 Seneffe (Feluy) (BE).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),

[Continued on next page]

(54) Title: SLURRY LOOP POLYOLEFIN REACTOR

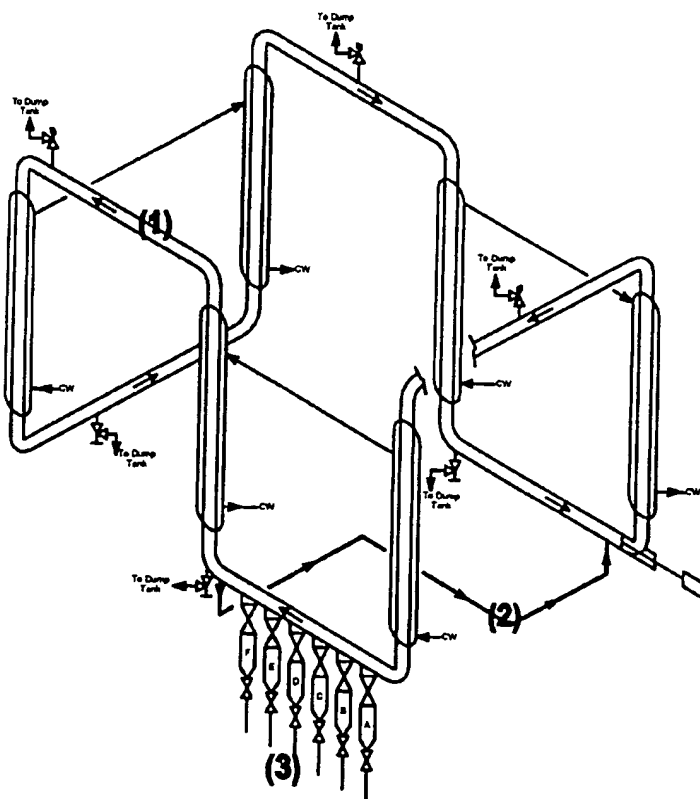

(57) Abstract: The present invention discloses a slurry loop reactor comprising one or more loops, capable of improving the properties of the product by enhanced homogeneity of the circulating slurry.

WO 2004/026463 A1



Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,  
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,  
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,  
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**Published:**

— with international search report

### SLURRY LOOP POLYOLEFIN REACTOR.

5 The present invention relates to the polymerization of olefin monomers in a slurry loop reactor.

High density polyethylene (HDPE) was first produced by addition polymerization carried out in a liquid that was a solvent for the resulting polymer. That method was rapidly replaced by polymerisation under slurry conditions according to Ziegler or  
10 Phillips. More specifically slurry polymerisation was carried out continuously in a pipe loop reactor. A polymerization effluent is formed which is a slurry of particulate polymer solids suspended in a liquid medium, ordinarily the reaction diluent and unreacted monomer (see for Example US-A-2,285,721). It is desirable to separate the polymer and the liquid medium comprising an inert diluent and unreacted  
15 monomers without exposing the liquid medium to contamination so that said liquid medium can be recycled to the polymerization zone with minimal or no purification. As described in US-A-3,152,872, a slurry of polymer and the liquid medium is collected in one or more settling legs of the slurry loop reactor from which the slurry is periodically discharged to a flash chamber thus operating in a batch-wise manner.

20 The mixture is flashed in order to remove the liquid medium from the polymer. It is afterwards necessary to recompress the vaporized polymerization diluent to condense it to a liquid form prior to recycling it as liquid diluent to the polymerisation zone after purification if necessary.

25 Settling legs are often required to improve the polymer concentration in the slurry extracted from the reactor; They however present several problems as they impose a batch technique onto a continuous process.

30 EP-A-0,891,990 and US-A-6,204,344 disclose two methods for decreasing the discontinuous behaviour of the settling legs and thereby for increasing the solids concentration. One method consists in replacing the discontinuous operation of the settling legs by a continuous retrieval of enriched slurry. Another method consists in using a more aggressive circulation pump.

These methods slightly improve the continuity of the circulation and thereby the solids content, but there is still ample room for improvement. Indeed, slurry loop reactors are not perfectly mixed reactors. The slurry is composed of a liquid phase and a solid phase. Because of the significant differences between the specific masses of the liquid and of the solids, and because of the very low viscosity of the liquid, the components of the slurry are separated by centrifugal force when traveling through a curve with the solids being pushed towards the outer part of the curve. There is thus a concentration profile in the normal section of the reactor. The centrifugal force exerted by the circulation pump is also very large and decreases significantly the solids concentration in the middle of the reactor accumulating the solids close to the walls. There are numerous other causes of heterogeneity such as for example:

- the nature of the feed coming to the reactor that, under standard conditions, is made of mixed liquid and gas phases;
- discontinuous catalyst feed, currently occurring with chromium-based catalysts;
- discontinuous settling legs extraction.

When the reactor is pushed to its limits of operability, the energy consumption of the circulation pump increases on average and becomes less stable and the reactor temperature becomes unstable.

It is an object of the present invention to refrain the onset of the instabilities described hereabove.

It is another object of the present invention to produce a polymer with improved bulk density and reduced molecular weight distribution.

It is also an aim of the present invention to improve the catalyst productivity and therefore the reactor throughput.

It is another object of the present invention to improve the homogeneity of the flow in the loop reactor.

It is a further object of the present invention to increase the solids concentration in  
5 the reactor.

It is yet another object of the present invention to increase the production of polymer in a slurry loop reactor.

10 Accordingly, the present invention discloses a slurry loop reactor having one or more loops and comprising on at least one of the one or more loops, either a by-pass line (2) connecting two points of the same loop (1) by an alternate route having a different transit time than that of the main route and/or a modified circulation pump with internal re-circulation, and/or a mixing element that improves the homogeneity  
15 of the circulating slurry. Said slurry loop reactor is capable of improving the mixing within the reactor.

Throughout the present description the loops forming the slurry loop reactor can be in parallel or in series and additionally, each loop can be folded.

20

Figure 1 represents schematically the loop reactor (1) with a by-pass line (2) inserted between two points of the main loop. It also includes the settling legs (3).

Optionally, the by-pass may be jacketed.

25

Any one or more of the loop reactor modifications recited here-above can be implemented on any of one or more of the loops in the reactor.

The by-pass line carries a fraction of the slurry of from 0.5 to 50 % of the total flow  
30 rate, preferably of 1 to 15 % of the total flow rate.

The flow time through the by-pass line is different from the time necessary to travel through the main loop as the routes have different lengths. This difference in travel

time results in longitudinal mixing that improves the homogeneity of the slurry within the reactor.

5 Preferably, the distance traveled by the slurry in the by-pass is shorter than that traveled in the main loop, and the slurry is re-injected in the main loop at an angle of from 1 to 90 degrees, preferably at an angle of from 30 to 60 degrees and more preferably at an angle of about 45 degrees.

10 The diameter of the by-pass is less than that of the main loop and the ratio  $DB/DL$  of the by-pass diameter  $DB$  to the loop diameter  $DL$  is of from 1:12 to 1:2, preferably of from 1:6 to 1:3.

15 The present invention further discloses the use of a by-pass line connecting two points of the main loop (1) by an alternate route having a different transit time than that of the main route, for improving the homogeneity of the circulating fluid in a slurry loop reactor.

20 In a second embodiment according to the present invention, the homogeneity of the fluid circulating through a slurry loop reactor is improved by modifying the circulating pump so that it operates with a significantly reduced efficiency, of from 30 to 75 %, significantly lower than the efficiency obtained on standard slurry loop reactors. The pump efficiency could potentially be reduced further.

25 This is achieved by allowing from 0.5 to 50 % of the flow, and preferably from 1 to 25 % of the flow, to be re-circulated from the pressure side of the impeller blade to the suction side of the same impeller blade.

30 The re-circulation is carried out by leaving an empty space between one or more blade(s) of the impeller and the shroud of the pump, said space being of the order of from 0.5 to 10 % of the pump radius and preferably of from 1 to 5 % of the pump radius.

Alternatively, the re-circulation can be achieved by the presence of holes in the impeller blades. The total surface of the holes is of from 0.1 to 35 % and, preferably of 0.5 to 15 %, of the surface of the blade measured in its central plane. The holes can have any shape and position and can be absent from some blades.

5

In a third embodiment according to the present invention, the radial homogeneity of the flow in the slurry loop reactor is improved by the insertion of fixed obstacles within the reactor.

10 The obstacles can be massive or in the shape of conduits.

The positions of the obstacles are selected to reduce the heterogeneities and are thus located where heterogeneities are most likely to occur such as for examples at curves or at pump discharge.

15

The polymer products obtained with the modified loop reactor according to the present invention have a bulk density that is from 1 to 5 % higher than that of the polymer products obtained with the unmodified loop reactor.

20 The molecular weight distribution (MWD) is defined by the polydispersity index D which is the ratio  $M_w/M_n$  of the weight average molecular weight  $M_w$  to the number average molecular weight  $M_n$ . It is typically reduced by 5 to 15 % in the polymer products obtained with the modified loop reactor according to the present invention.

25 The catalyst productivity is substantially improved without any loss in production. The catalyst productivity is typically increased by 10 to 50 %.

This improvement in catalyst productivity is obtained thanks to an increase of the residence time in the reactor and to the extension of the stable operation window. It

30 has been observed that the solids content, measured as the ratio of the particle mass flow rate to the total mass flow rate, is increased by at least 1.5 %, preferably by at least 3 %.

Examples.

The same loop reactor has been used to polymerize a given grade of high density polyethylene (HDPE) with and without a by-pass. The operating conditions were the same and they are summarised in Table I.

TABLE I.

	Without by-pass	With by-pass
Number of data	414	296
Temperature °C	107	107.6
[C2] wt%	4.97	4.80
[C6] wt%	0.04	0.04
Productivity (g/g)	2652	3651
Production (t/h)	7565	7704
HLMI g/10 min	2.10	2.07

The HLMI was measured following the method of standard test ASTM D 1238 at 190 °C and under a load of 21.6 kg.

As can be observed, the catalyst productivity was substantially improved without any loss of production.



CLAIMS.

1. A slurry loop reactor having one or more loops and comprising on at least one of the one or more loops either a by-pass line (2) connecting two points of the main loop (1) by an alternate route having a different transit time than that of the main route and/or a modified circulation pump with internal re-circulation, and/or a mixing element that improves the homogeneity of the circulating slurry.
2. The slurry loop according to claim 1 wherein the by-pass line carries a fraction of the slurry of from 0.5 to 50 % of the total flow rate.
3. The slurry loop according to claim 2 wherein the by-pass line carries a fraction of the slurry of from 1 to 15 % of the total flow rate.
4. The slurry loop according to any one of the preceding claims wherein the slurry traveling in the by pass line is re-injected in the main loop at an angle of from 1 to 90 degrees.
5. The slurry loop according to any one of the preceding claims wherein the ratio DB/DL of the diameter of the by-pass DB to that of the main loop DL is of from 1:12 to 1:2.
6. The slurry loop according to any one of the preceding claims wherein the ratio DB/DL of the diameter of the by-pass DB to that of the main loop DL is of from 1:6 to 1:3.
7. The slurry loop reactor according to any one of the preceding claims capable of improving the longitudinal mixing within the reactor, characterised in that the circulating pump operates at an efficiency between 30 to 75 %.

8. The slurry loop reactor of claim 7 wherein the pump efficiency is reduced by leaving an empty space between one or more blades of the impeller and the shroud of the pump.

5 9. The slurry loop reactor of claim 7 or claim 8 wherein the pump efficiency is reduced by the presence of holes in the impeller blades.

10 10. The slurry loop reactor according to any one of the preceding claims having fixed obstacle therein to improve the radial homogeneity of the flow in the slurry.

11. Use of the slurry loop reactor according to any one of the preceding claims to improve the catalytic productivity without any loss of polymer production.

15 12. Use of the slurry loop reactor according to any one of claims 1 to 10 to increase the bulk density of the polymer product.


20 13. Use of the slurry loop reactor according to any one of claims 1 to 10 to increase the stable operation window.

14. Use of the slurry loop reactor according to any one of claims 1 to 10 to improve the homogeneity of the longitudinal flow in the reactor.

25 15. Use of the slurry loop reactor according to any one of claims 1 to 10 to increase the solids content in the reactor by a factor of at least 1.5 %, said solid content being defined as the ratio of the particle mass flow rate to the total mass flow rate.

1/1

Figure 1.

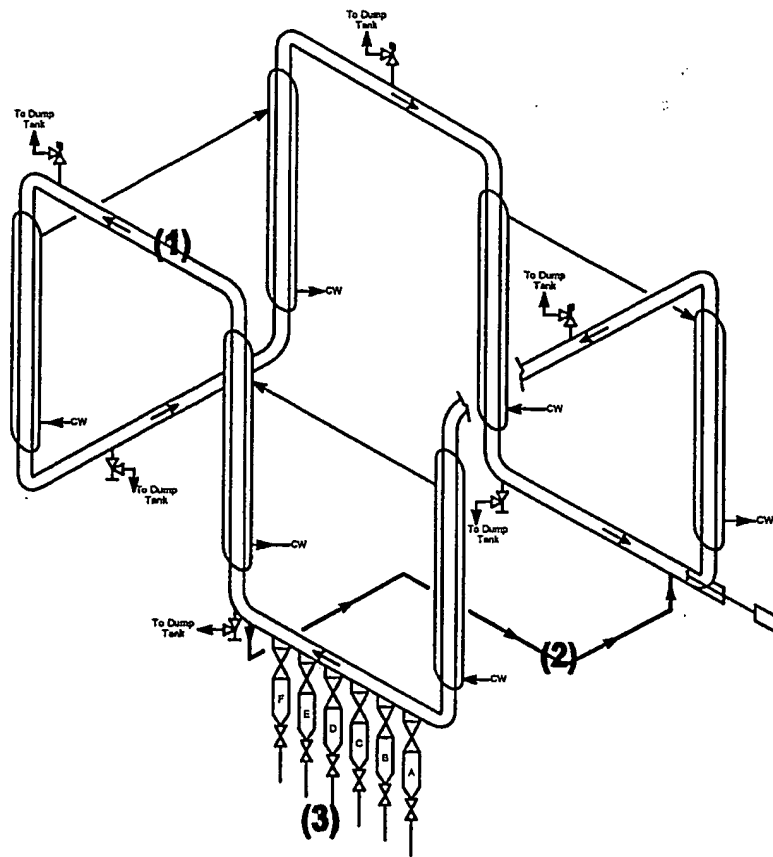

# INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 03/10704

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 B01J19/18 B01J19/24 C08F10/00 C08F2/14

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 B01J C08F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0 307 238 A (DAINIPPON INK & CHEMICALS) 15 March 1989 (1989-03-15) page 3, line 5 - line 32; figure -----	1,10-15
A	US 5 602 216 A (JUVET JACQUES) 11 February 1997 (1997-02-11) the whole document -----	1,10-15
A	EP 0 516 037 A (NESTE OY) 2 December 1992 (1992-12-02) the whole document -----	1,10-15
A	DE 26 34 471 A (SEIFERT WILHELM) 2 February 1978 (1978-02-02) page 6, paragraph 4 -page 7, line 19 page 8, paragraph 4 -page 10, line 13; figures -----	1,10

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

### \* Special categories of cited documents :

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

\*G\* document member of the same patent family

Date of the actual completion of the international search

15 December 2003

Date of mailing of the international search report

22/12/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax (+31-70) 340-3016

Authorized officer

Van Belleghem, W

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 03/10704

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 0307238	A	15-03-1989	JP 1070507 A	16-03-1989
			JP 2560342 B2	04-12-1996
			CA 1308854 C	13-10-1992
			DE 3880242 D1	19-05-1993
			DE 3880242 T2	21-10-1993
			EP 0307238 A2	15-03-1989
			US 4948847 A	14-08-1990
US 5602216	A	11-02-1997	EP 0755945 A1	29-01-1997
			AU 706258 B2	10-06-1999
			AU 6066696 A	30-01-1997
			CA 2181633 A1	27-01-1997
			DE 59504339 D1	07-01-1999
			JP 9040704 A	10-02-1997
EP 0516037	A	02-12-1992	FI 912602 A	01-12-1992
			EP 0516037 A2	02-12-1992
			JP 5230107 A	07-09-1993
DE 2634471	A	02-02-1978	DE 2634471 A1	02-02-1978